DEVELOPMENT REVIEW APPLICATION

FOR STAFF CO	MPLETION
PROJECT NO. DP-16	2-12
STAFF CONTACT SAR	
NON-REFUNDABLE FEE(S)	1250-
REFUNDABLE DEPOSIT(S)	-
TOTAL FEES	1250-

		TOTAL FEES 1250-
Type of Review (Please check all that apply):	:	
Annexation	Historic Review	Quasi-Judicial Plan or Zone Change
Appeal and Review *	Legislative Plan or Change	Street Vacation
Conditional Use	Lot Line Adjustment * /**	Subdivision
Design Review	Minor Partition (Preliminary Plat or Plan)	Temporary Uses *
Easement Vacation	Non-Conforming Lots, Uses & Structures	Tualatin River Greenway
Extraterritorial Ext. of Utilities	One-Year Extension *	Variance
Final Plat or Plan	☐ Planned Unit Development	Water Resource Area Protection/Wetland
Flood Plain Construction	☐ Pre-Application Conference *	Willamette River Greenway
Hillside Protection and Erosion Control		
Home Occupation, Pre-Application, Sidewalk Use Application*, Sign Review Permit Application*, and Temporary Sign Permit Application require different or additional application forms, available on the City Website or at City Hall.		
Con to the table	.,	
Site Location/Address 1689 62	s se	Assessor's Map No.
	11.65 101.1	Tax Lot 31E02BC00900
	1697 6 th AUR.	Total Land Area
Brief Description of Proposal		
New Home Construction		
Owner Name & Address	Check if this is the applicant.	Phone 503 527 6787
Brian Mc Millen		Email bm &3 @ Me. com
15151 SEFTYE HADE VA	Mey 97086	Email BM &S & ME COM
Consultant Name & Address	Check if this is the applicant.	hone
N 1 /1		RECEIVED
I N/A		Email Land
All application fees are non-refundable	e (excluding deposit).	
2. The owner/applicant or their representative should be present at all public hearings. APR 2 2 2011		
3. A denial or approval may be reversed on appeal. No permit will be in effect until the appeal period has expired.		
4. Three (3) complete hard-copy sets (single sided) of application materials must be submitted with this application.		
One (1) complete set of digital application materials must also be submitted on CD in PDF formatty OF WEST LININ		
If large sets of plans are required in application please submit only two sets.		
* No CD required / ** Only one copy needed		
The undersigned property owner(s) hereby authorizes the filing of this application, and authorizes on site review by authorized		
staff. I hereby agree to comply with all code requirements applicable to my application. Acceptance of this application does not		
infer a complete submittal. The applicant waives the right to the provisions of ORS 94.020. All amendments to the Community		
Development Code and to other regulations adopted after the application is approved shall be enforced where applicable.		
Approved applications and subsequent development is not vested under the provisions in place at the time of the initial		
application // // //		
11/12/10		
Applicants signature		
11/12/10		
Owner's signature Date		









Chapter 25 OVERLAY ZONES - HISTORIC DISTRICT

25.010 PURPOSE

The intent and purpose of this overlay district is to implement the goals and policies of the Comprehensive Plan for the Historic District, and promote the public health, safety, and general welfare by safeguarding the City's heritage as embodied and reflected in its historic resources. The provisions of this section are intended to:

- A. Provide for the identification, protection, enhancement, and use of sites, structures, corridors, objects, and buildings within the City that reflect special elements of the City's architectural, archeological, artistic, cultural, engineering, aesthetic, historical, political, social, and other heritage. In addition to the Willamette District, this code section also contemplates creation of new districts as appropriate;
- B. Facilitate restoration and upkeep of historic buildings, structures or other physical objects or geographical areas;
- C. Encourage public knowledge, understanding and appreciation of the City's history and culture;
- D. Foster community and neighborhood pride and sense of identity based on recognition and use of cultural resources;
- E. Promote the enjoyment and use of historic and cultural resources appropriate for the education and recreation of the people of the City;
- F. Preserve diverse architectural styles reflecting phases of the City's history, and encourage complimentary design and construct impacting cultural resources:
- G. Enhance property values and increase economic and financial benefits to the City and its inhabitants;
- H. Identify and resolve conflicts between the preservation of cultural resources and alternative land uses;
- I. Integrate the management of cultural resources and relevant data into public and private land management and development processes; and
- Encourage the adoption and use of the Secretary of Interior's Standards for Historic Preservation. (Ord. 1594 § 1 (Exb. A), 2010)

Response: The proposed new home on a single existing lot of record meets the standard because – It is designed in a classic craftsman bungalow style that is consistent with the Historic District.

25.015 APPLICABILITY

The provisions of this chapter shall apply to all properties and structures within the Willamette Historic District boundary as depicted on the map referenced in CDC 25.030. The single-family residential design standards that apply to homes elsewhere in West Linn shall not apply to homes within the historic district. The standards of this chapter shall supersede any conflicting standards appearing in CDC 26.060. (Ord. 1538, 2006; Ord. 1594 § 1 (Exh. A), 2010)

25.020 PERMITTED USES


A. The residentially zoned portion of the Willamette Historic District, and other historic districts established under CDC <u>25.050</u>, shall permit only single-family detached residential uses. Home occupations shall be processed pursuant to Chapter <u>37</u> CDC.

Response: The proposed new home on a single existing lot of record meets the standard because – A single family dwelling on a lot of record is an allowed use on the site.

25.070 APPROVAL CRITERIA FOR REMODELS, NEW HOME AND ACCESSORY STRUCTURE CONSTRUCTION

A. For new home construction, remodels and single-family structures in the Willamette Historic District (and landmark structures as appropriate), the Historic Review Board shall use the following design standards in reaching a decision.

B. Siting.



- 1. Front yard:
- a. The front yard setback shall be the distance measured from the front property line to the dominant vertical face of the building, exclusive of any porches or front landings, equal to the average of the front setbacks of adjacent homes. For corner lots, the setback shall be the average between the adjacent house to the side and 20 feet.
- b. Unenclosed porches with no living space above may encroach six feet further from the dominant vertical face of the building.

Response: The proposed new home on a single existing lot of record meets the standard because – It is sited with a 20' front yard setback.

2. Side yard: Five feet shall be the standard; however, where adjacent structures encroach into the required side yard, the Planning Director may reduce one of the side yards to a minimum of three feet to center a new structure between existing buildings, provided no space between buildings is reduced below eight feet. To encourage sidewall variation, "pop outs," including chimneys, may intrude 18 inches into side yard setback.

Response: The proposed new home on a single existing lot of record meets the standard because – The house has a minimum 5' side yard setback on both sides.

- 3. Side street: 10 feet for both developed and undeveloped street. To encourage sidewall variation, "pop outs," including chimneys, may intrude 24 inches into side street yard setback, after every 400 square feet of sidewall.
- 4. Rear yard: The rear yard setback shall be a minimum of 20 feet, except for accessory structures (non-dwelling or non-accessory dwelling units (ADU)), which may be sited to within three feet of the side or rear property lines. See section on ADUs for ADU setbacks.

Response: The proposed new home on a single existing lot of record meets the standard because – The house has a minimum 20' rear yard setback.

- 5. Orientation: New home construction on corner lots must orient the front of the house to the avenue and not the street.
- 6. Lot coverage: 50 percent. Unlike the rest of West Linn, lot coverage shall apply to the new and remodeled primary dwellings, attached and detached garages, all accessory buildings and ADUs. Decks, paved and impermeable surfaces (patios and driveways etc.) shall not be included. Underlying zone (e.g., R-5) lot coverage shall not apply.

Response: The proposed new home on a single existing lot of record meets the standard because – The total lot coverage for both the new house and the single car detached garage is less than 2500 sq ft (50% of the 5000 sq ft lot).

- C. Parking. Parking in Willamette Town traditionally was handled from the alleys or along the "streets" (as opposed to avenues).

 Detached garages along the alleys or "streets" characterizes many homes in the district. Alleys were established to provide for access to off-street parking, including garages.
- 1. Standards, garages.
- a. Garages shall be accessed from the alley. Where no alley exists, access to a garage may be from the street.
- b. Garage remodels and new construction must match house or existing garage building materials.
- c. Typically, the garage roof pitch was not as steep as the house. Some architectural styles of garages have lower pitched roofs. Garage roof pitch shall not exceed house roof pitch.
- d. Garages located within the rear yard may have a zero-foot side yard setback so long as it is constructed with one-hour fire walls, with no openings in wall and no overhang, per City building standards. The three-foot rear setback shall still apply.

Response: The proposed new home on a single existing lot of record meets the standard because – The proposed single car garage is accessed from the alley and matches the house with materials and construction style. The garage is setback 3' from the alley ROW.

- 2. Standards, parking.
- a. No residential lot shall be converted solely to parking use.
- b. All vehicle access and storage (i.e., boats, camper shells, trails, recreational vehicles, etc.) shall be stored or parked in the rear of the property as opposed to the front or side yards.

d. No front yard curb cut shall be established unless it is determined by the City Engineer that all reasonable access alternatives have been exhausted.

Response: The proposed new home on a single existing lot of record meets the standard because – No front yard curb cut is proposed.

- D. Building height. (Note: Buildings in Willamette Town vary in height; most evident are one and one-half story Victorians and bungalows. Some buildings reach two stories, and there are several single-story structures as well.)
- 1. No building shall exceed the height of 28 feet to the dominant gable or roof ridgeline as measured per Chapter <u>02</u> CDC. This restriction shall apply regardless of the existing or finished grade of the site.

Response: The proposed new home on a single existing lot of record meets the standard because – The total height of the house is less than 28' to the roof ridge line (see elevation drawing).

2. In order to transition in scale, new houses that are taller than homes adjacent to them must have the predominant roof ridgeline extending perpendicular to the front property line so that the roof slopes down on the sides to effect that transition. Dormers are allowed on that sloping roof area facing the adjacent home(s) but cannot constitute more than 25 percent of the roof as measured lineally or horizontally (e.g., if roof is 50 feet long the dormer(s) cannot be more than 25 percent of that distance or 12.5 feet long in total). Also, the dormer height must be at least two feet below the gable ridgeline height.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling has a dominant ridge line similar to the houses adjacent on both sides.

- 3. Cupolas and towers are not excluded from the aforementioned height limitation.
- E. Building shapes and sizes.
- 1. No building on a 50-foot-wide lot shall exceed 35 feet in overall width. Lots with a 65-foot width or greater may have a building width of 40 feet plus the porches, eaves or veranda extensions so that the maximum total width is 47 feet.

Response: The proposed new home on a single existing lot of record meets the standard because – The house is less than 35' wide.

- 2. End walls (street facing) shall be designed with consideration of scale and aesthetic character of the main facade.
- 3. Buildings shall avoid a horizontal orientation in their roof and window designs, unless the design can be shown to match the original roof design or approximate the design of nearby structures and styles.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling has a dominant ridge line similar to the houses adjacent on both sides.

4. Sidewalls on the side of new homes shall have a minimum 18-inch "pop out" or indent after every 400 square feet of sidewall measured laterally/horizontally. The "pop out" or indent shall be at least six feet wide and shall be at least nine feet tall. (Bay windows could qualify). Sidewalls on the side street side of new homes shall have minimum 24-inch "pop out" or indent after every 400 square feet of sidewall measured laterally/horizontally. "Pop outs" may intrude into the setback area.

Response: The proposed new home on a single existing lot of record meets the standard because – There is one large pop-out on each side of the new dwelling in compliance with this standard.

H. Windows. Window sizes vary considerably in the district. Windows on the primary and secondary structures are wood sash, usually a double hung type. Victorian styled structures typically have narrower, vertically-oriented windows. Bungalow styled structures from the "Craftsman" era (1905 – 1930) may have wider windows with mullions across the top of larger paned areas. Most windows have fairly wide trim boards, usually five inches. Standards:

Response: The proposed new home on a single existing lot of record meets the standard because – The windows are designed with craftsman style features (see cut-sheet).

- 2. Aluminum windows are prohibited unless they were the original materials and meet dimensional standards.
- 3. Windows shall be surrounded by exterior trim on the top and sides; window trim shall be at least four and one-half inches minimum width unless the original window was less.

Response: The proposed new home on a single existing lot of record meets the standard because – The proposed window trim detail exceeds the above standard (see window detail).

- I. Entryways. Porches are a key architectural feature on most homes in Willamette Town. Frequently, the porch and entryway creates a dominant architectural feature on the main facade. On corner lots, the entry usually faces the east-west avenues. Front doors are often notably detailed; many contain glass panes or carvings. Standards:
- 1. Buildings shall have a permanently protected entry. Awnings are not permanent protection.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling is designed with a covered front porch (typical in craftsman homes).

2. All main entrances should face the avenues.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling is oriented with the front door facing the public street.

- 3. Flush (flat) doors are prohibited.
- 4. Doors with windowed areas are recommended. Front porch enclosure of any dwelling unit may not be enclosed. Back porches may be enclosed.

Response: The proposed new home on a single existing lot of record meets the standard because – The proposed front door is craftsman style with windows (see cut-sheet).

- J. Siding and exterior finish. Standards:
- 1. Horizontal wood siding shall be the primary exterior finish.
- 2. Shingles should only be used in conjunction with horizontal wood siding.
- 3. Single color exteriors are discouraged. Stained exteriors are not recommended.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling is designed with horizontal siding and accent shingles. See proposed color selections.

- K. Roofscape. Standards:
- 1. Roofs shall have a pitch of at least 8:12 to maintain the pattern of steep roof pitches. The Historic Review Board will consider deviations from the 8:12 to 12:12 standard for additions to the main body of the house so long as it is consistent with a particular architectural style.
- 2. Roofing materials should be asphalt composite shingles.
- 3. Alternating or checkerboard shingles are not permitted.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling is designed with the specified minimum roof pitch and composition shingle roofing finish.

L. Massing. The square footage of the principal dwelling/ house and any attached garage (not counting the basement) cannot exceed 125 percent of the average square footage of the adjacent homes (and any attached garage) on either side of the subject house, or 1,200 square feet, whichever is greater. For the purpose of this section, homes to the rear, or across the street, shall not be used as the basis of the square footage calculation. Homes on corner lots shall base their square footage on the one house and any attached garage adjacent to them. The square footage of the adjacent home will be based on actual measurement of all livable space in the house plus any attached garage (exclude crawlspaces or attic areas with less than five-foot vertical clearance plus all basement areas).

Response: The proposed new home on a single existing lot of record meets the standard because – Is a maximum of 125% of the mass of the 2 adjacent homes (basement is not calculated in this figure).

- M. Foundations and basements.
- 1. Foundations may be poured concrete or brick faced concrete and shall be exposed at least one to two and one-half feet on the front elevation (depending on whether the lot is an uphill or downhill lot) to accommodate front steps and/or a raised porch. Final foundation grade will impact the height of the house. Misrepresentations or errors in determining the height of the house due to site conditions and height of foundation wall cannot be used to justify any house heights in excess of the allowed height. No backfilling is allowed against a foundation wall to increase grades.
- 2. Basements shall be defined as livable or functional space below the main floor of the principal dwelling/house which is exposed above grade a maximum height of two feet. Windows and window wells are permitted but not on the front elevation. The square footage of the basement shall not count in building square footage (re: ADU), mass calculations, etc.

Response: The proposed new home on a single existing lot of record meets the standard because – The new dwelling has the required exposed concrete foundation wall.

O. Sidewalks. Many of the original sidewalks had the contractor's name and date stamp or street names on them.

Response: The proposed new home on a single existing lot of record meets the standard because - The new sidewalk will be finished with the contractors name and date.

25.140 APPLICATION AND SUBMITTAL REQUIREMENTS

Standard requirements: All applications for alteration, relocation, development, or demolition made pursuant to this section shall include:

A. A pre-application conference with the Planning Director is required prior to formal submittal. The Director shall determine the appropriateness of the proposal and the completeness of the materials to be submitted. The Director may consult with members of the Historic Review Board in this process.

Response: The proposed new home on a single existing lot of record meets the standard because – A preapplication conference was held in November 2010.

B. The application is made with appropriate fees being paid. The applicant shall submit a written narrative explaining the proposal and how it meets the approval criteria. In cases involving construction, the applicant shall provide scaled site plans, elevations of the structure, and construction plans. A list of materials and proposed colors is required. Material boards/color samples may be needed. Photography may be used in certain cases. The exact requirements shall be explained by staff.


Response: The proposed new home on a single existing lot of record meets the standard because – The attached application documents provide all necessary information to review and approve this request.

C. The hearing, public notice, appeal, and enforcement provisions of Chapter 99 CDC shall apply. (Ord. 1474, 2001; Ord. 1594 § 1 (Exh. A), 2010)

JELD-WEN.

Windows

Siteline Ex Wood

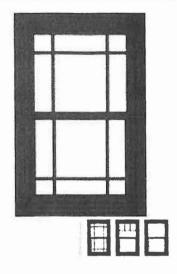

Siteline EX Double-Hung Window

- Color Options: 21 clad exterior colors, 10 wood interior finishes
- Wood Options: pine exterior and pine, alder, douglas fir interior
- · Glass Options: energy efficient, protective, textured, tinted
- · Maintenance Level: moderate
- Project Type: new construction and replacement
- ENERGY STAR® Qualified Options
- Some Configurations Eligible for Tax Credit: check with your dealer and tax professional to ensure eligibility
- Eco-Friendly Aspects: sustainable products with SFI® certified pine option, reduced VOCs with AuraLast The Worry-Free Wood®
- · Warranty: limited 20-years


Available Features:




Price Range: \$\$

View Details Find a Store


Vintage Homes NW - West Linn

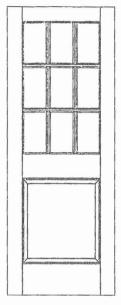

Rogue Valley Fir 4982 Flat Panel or Raised Panel Bottom - Clear Insulated Glass

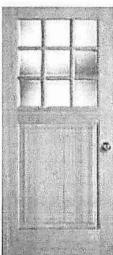

Simpson Fir 7226 Flat or Raised Panel Bottom - Clear Insulated Glass

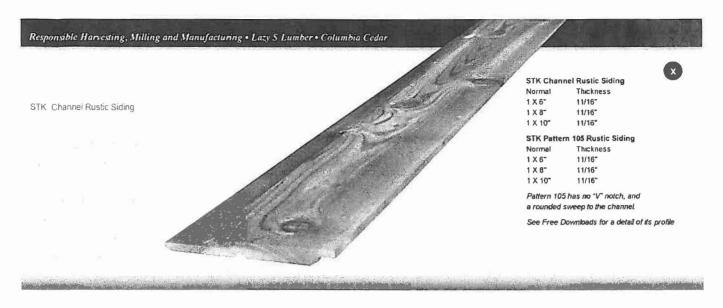

© 2010 Lazy S Lumber

Call Today 360-581-4350 Cedar Shingle Panels, Cedar Siding, Shingles and more.

HOME PRODUCTS ABOUT US GREEN CHOICE WHY PREMIER HOME PRODUCTS ABOUT US GREEN CHOICE WHY PREMIER CONTACT US







Shingle Products Lumber Products Specialty Products


THE PREMIER PANEL

Features & Benefits

The Premier Panel™ includes a factory installed rain screen system. The following article contains invaluable information about the importance of a furred system.

The mother of all weatherbarrier systems: The Vented Rain Screen

by Paul R. Fisette, Director Building Materials and Wood Technology University of Massachusetts, Amherst



The Premier Panel m is a major breakthrough in shingle panel design and technology. The Premier Panel m features an advanced two-ply "Cedar on Cedar" shingle panel design with a factory installed rain screen system.

nstalled rain screen system.



The Premier Panel™ Brochure

Premier's REAL GREEN® BROCHURE


Technical Bulletin 101Features and Benefits of the Premier Panel™.

Technical Bulletin 102Proper Fasteners for Western Red Cedar.

Technical Bulletin 103A Guide To Finishing Western Red Cedar

Technical Bulletin 104Installation Instructions for the Premier Panel™.

Technical Bulletin 105 Quick Reference; Premier Accessories Detail



Real Wood® Backer-board

The Premier Panel™ features a solid, naturally durable, Western Red Cedar backer-board in lieu of a plywood sheathing backer-board.

Two-Ply "Cedar on Cedar" Design

The Premier Panel™ is a true two-ply "Cedar on Cedar" design providing the optimum in weather protection and durability. There is no substitute for Western Red Cedar Shingles on a solid, naturally durable, Western Red Cedar backer-board.

Premier Forest Products is a proud manufacturer of Real Wood and Real Cedar products.



100% Vertical Grain - 100% Clear - 100% Heartwood

Premier uses 100% Vertical Grain, 100% Clear and 100% Heartwood Western Red Cedar shingles in their panel system. Testing and practical experience show that these shingles move less, cup less and retain finishes better than flat grain shingles.

Thick Butt Western Red Cedar Shingles

Premier manufactures its Western Red Cedar shingles to industry standards featuring a "thick butt" shingle for added longevity and style. Premier's rebutted and rejointed (R&Rs) shingles provide clean, crisp, distinctive shadow lines for optimum architectural appeal.

Band Sawn Textured Shingle Faces

Premier's vertical grain shingles have a textured band sawn "A" face, which absorb stains, paints and other finishes more readily and evenly compared to other milled surfaces. Real Cedar Key-Ways (Real Reasons)



CAMBRIDGE 30 AR

ARCHITECTURAL SHINGLES

Cambridge 30 AR combine beauty with contemporary strength. Manufactured in a larger size to offer more exposure and create a high definition "shake" look for your roof, these popular shingles are versatile and easy to maintain and come in a myriad of colors that can suit any home.

Cambridge 30 AR Super White shingles are ENERGY STAR® qualified.

IKO Cambridge Series: With its outstanding protection, strength and impressive architectural design, why choose anything else?

Cambridge 30 AR

- Feature an algae resistant granule
- 5-Year IKO Iron Clad Protection1
- Limited 30-Year Warranty¹
- Includes up to 70 mph (112 km/h) Limited
 Wind Warranty, upgrade to 110 mph (177 km/h)1

¹See Limited Warranty and shingle application instructions for complete information







Dual Black



Dual Brown



Aged Redwood



National Blue**



Charcoal Grey



Heatherwood



Earthtone Cedar



Harvard Slate



Weatherwood



Riviera Red





Driftwood



Forest Green



Coverage Per Bundle

Wind Warranty

Algae Resistant¹

Upgraded Limited Wind Warranty



40 7/8 in (1038

13 3/4 in

5 7/8 in 33.3 ft2 (149 (3.1 m²)

ASTM D3462 ASTM D3018 ASTM D3161- Class F ASTM E 108 - Class A ASTM D7158 - Class H CSA A123.5

CSA A123.51 CSA A123.52

110 mph kph)

Super White††

Note: All values shown are approximate. 'Product is designed and tested to comply with ASTM/CSA Standards at time of manufacture prior to packaging. 'See Limited Warranty and shingle application instructions for complete information.



IKO has developed a superior multi-layered roofing system incorporating our industry-leading products. IKO's Pro 4 Roofing System is setting the standard in protecting your home. Along with one of IKO's quality shingles, your Pro 4 system includes at least 3 of these accessory products.



Eave Protection

GoldShield. ArmourGard, or StormShield Ice & Water Protectors



Roof Starters

Leading Edge Plus or Leading Edge Starter Strips



Underlayment

Asphalt Saturated Feit*, RoofGard-SB or RoofGard-Cool Grey Underlayments



Ridge Cap Shingles

Marathon Ultra AR, Hip and Ridge, Hip & Ridge 12 Cap Shingles or Ultra HP High Profile Ridge Cap Shingles

Shingle Swatches shown are as accurate as modern printing processes allow. Shingle chips shown do not fully represent the entire color blend range of the shingles. To ensure complete satisfaction please make your final color selection from several full size shingles and view a sample of the product installed on a home. The information in this literature is subject to change without notice. We assu responsibility for errors that may appear in this literature.

*Product Availability may vary by region.

**Blue granules may fade after extensive exposure to the sun's ultraviolet rays.

††Super White is ENERGY STAR® qualified.

Find out more about our products now by talking to an IKO Sales Representative, your professional roofing contractor or contact us directly at:

United States 1-888-IKO-ROOF or visit our web site at:

www.iko.com

Find just the right colors for your home with our easy-to-use online tool.

Accent

Peryter Lankard

SW 0023

Accent 2

Polished Mahogany

SW 0023

COLORS SHOWN

BTA



Body

Sheraton Sage

SW 0014

Trim

Downing Sand

SW 2822

Accent

Rookwood Antique Gold

SW 2814

• Accent 2

Fairfax Brown

SW 2814

OTHER OPTIONS

BTA



Body

Renwick Olive

SW 2815

Trim

Downing Sand

SW 2822

Accent

Rookwood Dark Green

SW 2816

Accent 2

Rookwood Amber

SW 2816

 $http://www.sherwin-williams.com/do_it_yourself/paint_colors/ideas/palettes/exterior-color-schemes/americas-heritage/index.jsp$



Destination LIGHTING

Destination LIGHTING

Search >

Contact Detail



Huge inventory In-Stock & ready to ship Free Shipping on orders \$50.00 or more*
*EXCLUDES ALASKA & HAWALL GROEPS

ADD TO WISH LIST SEND TO A FRIEND PRINT THIS PAGE



8-1/2-Inch Wide Outdoor Wall Light

\$57.90

IN STOCK & IN OUR WAREHOUSE

Quantity: 1

FREE SHIPPING

BUSINESS DAY

Name but a per-

(1 Rating)

Write a Review Read 1 Review

You will also need



Qty 1 \$1.79 ea.

More from this collection



\$69.90 ea.

You may also like



\$39.00 ea.



\$93.00 ea.



\$62.00 ea.



\$59.00 ea.



\$55.90 ea.



^4^4

PRODUCT NUMBER: 212023

MANUFACTURER:

MODEL NUMBER: 8101-138

COLLECTION: Great Outdoors

FINISH: Hammered Bronze

HEIGHT: 6 in.

WIDTH: 8-1/2 in.

WALL PROJECTION: 10-1/2 in.

Destination LIGHTING

Destination LIGHTING

Search >



The Huge inventory In-Stock & ready to ship

Destination Free Shipping on orders \$50 Mer. more Free Shipping on orders \$50.00 or more* "EXCLUDES ALASKA & HAWAII CRIDERS

ADD TO WISH LIST SEND TO A FRIEND PRINT THIS PAGE



11-Inch Outdoor Wall Light

USUALLY SHIPS IN 7-10 BUSINESS DAYS

(0 Ratings)

Write a Review

\$71.00

GET INFO NOW > ACCUTRACKER®

Quantity: 1

You will also need

Qty 1 \$0.95 ea.

More from this collection

\$47.00 ea.

\$67.00 ea.

You may also like

\$27.00 ea.



\$69.00 ea.



\$49.00 ea.




\$79.00 ea.

\$109.00 ea.

WIDTH: 8 in.

WALL PROJECTION: 9-1/4 in.

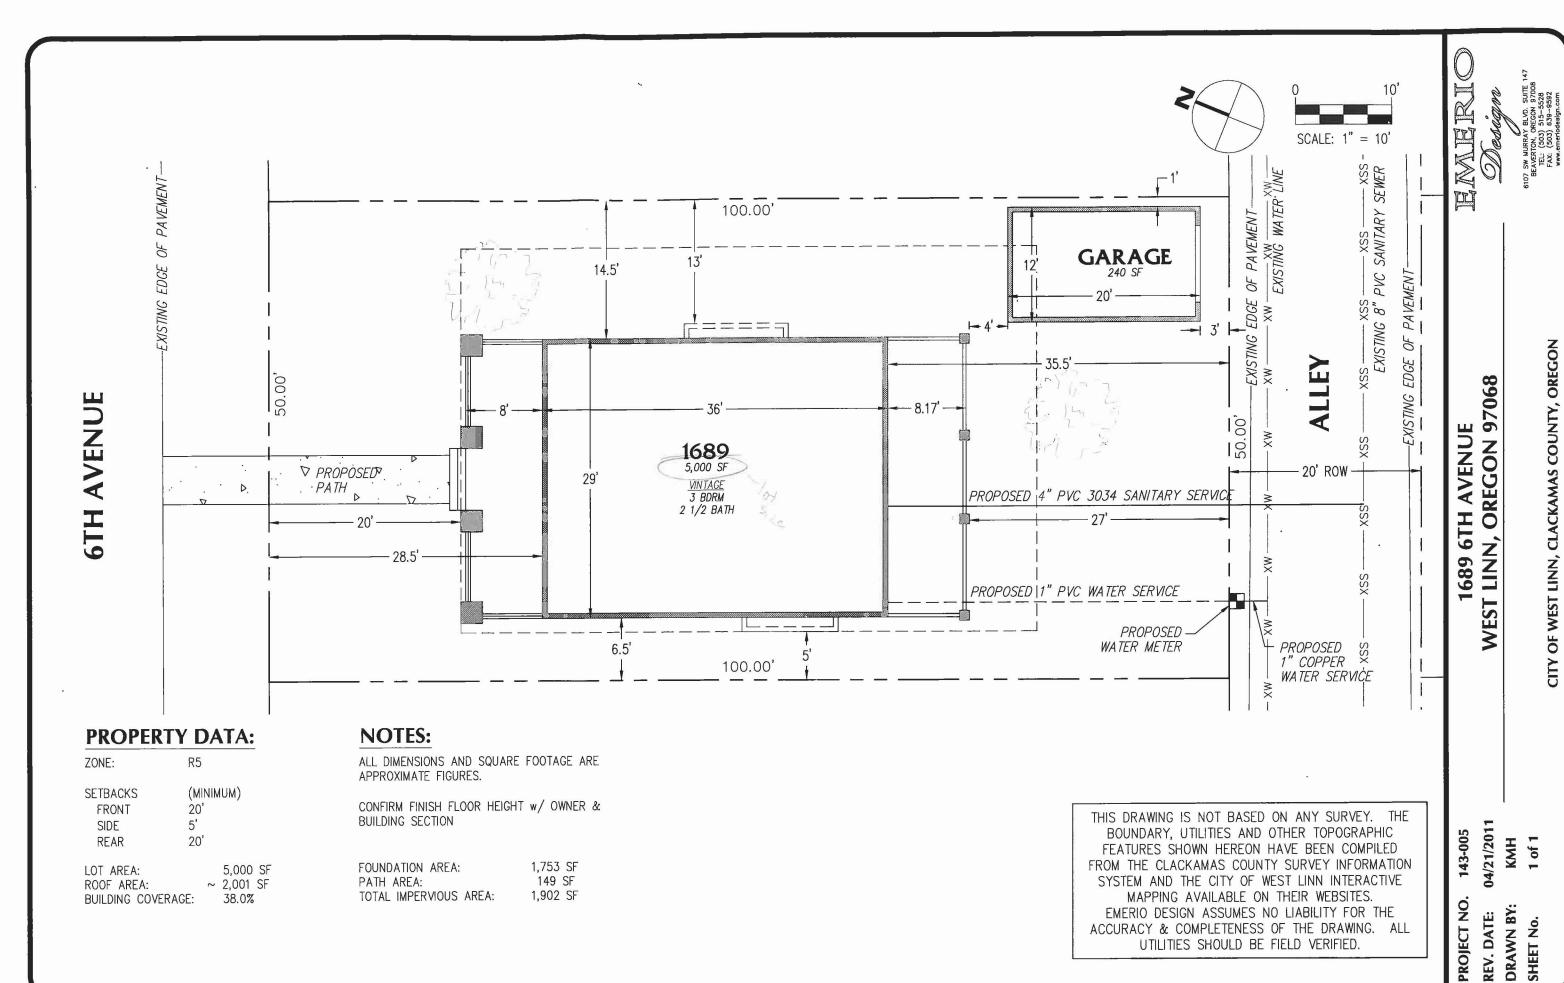

UTILITIES SHOULD BE FIELD VERIFIED.