

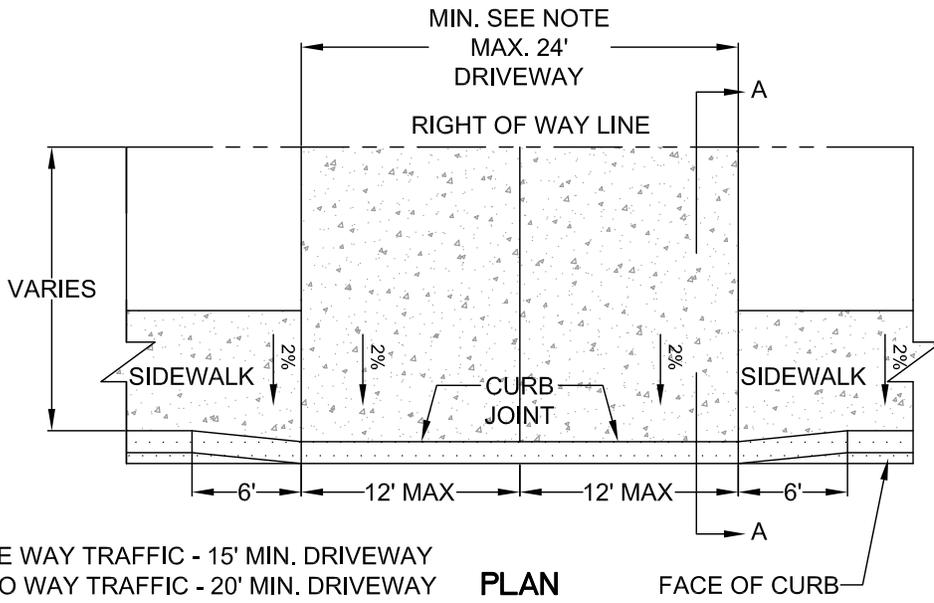


THIS DETAIL DRAWING SHALL NOT BE ALTERED OR CHANGED IN ANY MANNER EXCEPT BY THE CITY ENGINEER. IT IS THE RESPONSIBILITY OF THE USER TO ACQUIRE THE MOST CURRENT VERSION OF THE DETAIL.

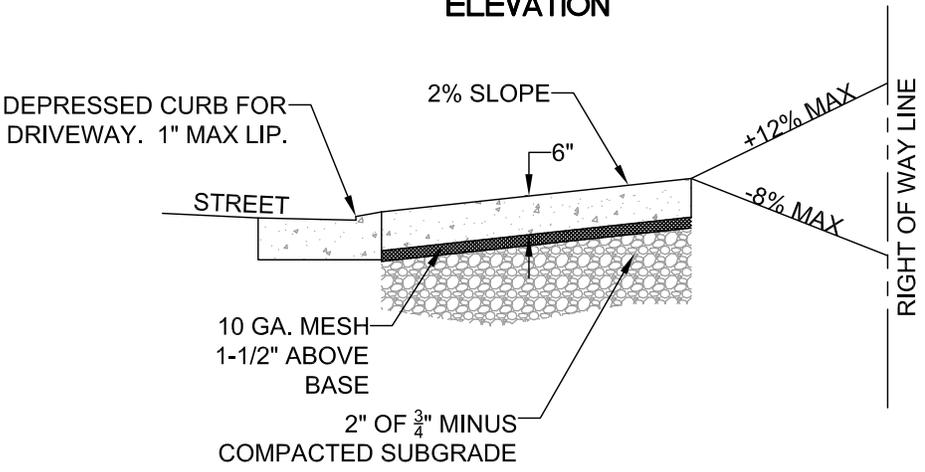

NOTE:
 ONE WAY TRAFFIC - 15' MIN. DRIVEWAY
 TWO WAY TRAFFIC - 20' MIN. DRIVEWAY

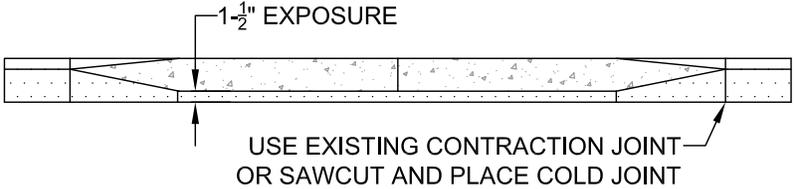

- NOTE:**
1. CONCRETE SHALL HAVE A MINIMUM BREAKING STRENGTH OF 4000 PSI AFTER 28 DAYS, 6 SACK MIX
 2. CURB JOINT SHALL BE A TROWELED JOINT WITH A MIN. 1/2" RADIUS ALONG BACK OF CURB
 3. DRIVEWAY SHALL BE A MINIMUM 6" THICK
 4. DRIVEWAY CURB CUT SHALL COMPLY WITH THE CONDITIONS OF 5.0070, "WIDTH AND LOCATION OF CURB CUTS"

**COMMERCIAL DRIVEWAY
 WITH
 SIDEWALK ADJACENT TO CURB**

<p style="font-size: 24px; margin: 0;">West Linn</p> <p style="font-size: 10px; margin: 0;">CITY OF</p>	DATE: 2010
	DRAWING NO. WL-504B
	FILE NO.